

# DIN Control and Indication

This section provides a selection of Isolating, Changeover and Selector Switches, Push Buttons, Indicator Lights, Delay Timers, Emergency Lighting Test Packages, DIN Socket Outlets and Contactors that are used for isolation, installation monitoring and circuit control.



---

|  |     |
|--|-----|
| Isolating Switches                         | 118 |
| Manual Changeover Switches                 | 119 |
| Selector Switches                          | 120 |
| Contactors                                 | 121 |
| Hum-free Contactors                        | 122 |
| Latching and Interface Relays              | 123 |
| Push Buttons                               | 124 |
| Indicator Lights and DIN Socket Outlets    | 125 |
| Transformers, Bells and Buzzers            | 126 |
| Emergency Lighting Discharge Test Packages | 127 |
| Technical Information                      | 128 |

---

## Description

For use as a switch isolator in all types of circuits. As defined in AS/NZS3000-2018, clause 2.3.3.2: "The supply to every installation shall be controlled by a main switch or switches that control the whole installation". Positive contact indication, with ON position 'I' in red and OFF position 'O' in green.

## Technical data

- AC 22B duty specification (mixed resistive and inductive loads. Not motors)
- PZ2 terminal screw for all ratings
- Bi-connect terminals

## Connection capacity

- In: 40A
- 25mm<sup>2</sup> rigid cables
- 16mm<sup>2</sup> flexible cables
- In: 63A and higher
- 50mm<sup>2</sup> rigid cables
- 35mm<sup>2</sup> flexible cables

## Standards

- Compliant with AS/NZS IEC 60947-3 and IEC60669-2-4 for ratings up to 63A

**Technical information:** [Page 128](#)



SBR164

## Single pole



| Characteristics | Width | Cat ref.      |
|-----------------|-------|---------------|
| 1 x 40A 230V~   | 1 mod | <b>SBR140</b> |
| 1 x 63A 230V~   | 1 mod | <b>SBR164</b> |
| 1 x 80A 230V~   | 1 mod | <b>SBR180</b> |
| 1 x 100A 230V~  | 1 mod | <b>SBR190</b> |



SBR264

## Double pole




| Characteristics       | Width | Cat ref.      |
|-----------------------|-------|---------------|
| 2 x 40A 230 to 400V~  | 2 mod | <b>SBR240</b> |
| 2 x 63A 230 to 400V~  | 2 mod | <b>SBR264</b> |
| 2 x 80A 230 to 400V~  | 2 mod | <b>SBR280</b> |
| 2 x 100A 230 to 400V~ | 2 mod | <b>SBR290</b> |



SBR399

## Triple pole




| Characteristics | Width | Cat ref.      |
|-----------------|-------|---------------|
| 3 x 40A 400V~   | 3 mod | <b>SBR340</b> |
| 3 x 63A 400V~   | 3 mod | <b>SBR364</b> |
| 3 x 80A 400V~   | 3 mod | <b>SBR380</b> |
| 3 x 100A 400V~  | 3 mod | <b>SBR390</b> |
| 3 x 125A 400V~  | 3 mod | <b>SBR399</b> |



SBR490

## Four pole




| Characteristics              | Width | Cat ref.      |
|------------------------------|-------|---------------|
| 4 x 63A 400V~ neutral right  | 4 mod | <b>SBR464</b> |
| 4 x 100A 400V~ neutral right | 4 mod | <b>SBR490</b> |



ESC080

## Auxiliary contacts



| Characteristics  | Width   | Cat ref.      |
|--|---------|---------------|
| 1NO + 1NC 6A AC1<br>For remote indication, mechanical indicator to show the position of the contact. Maximum one auxiliary module per isolator device (left fitting) | 0.5 mod | <b>ESC080</b> |

**Description**

Manual Changeover Switches or DIN Rail Mounted Manual Transfer Switches (MTS) are for the manual switching between two or more electrical circuits.

**Technical data**

Utilization category: AC22B (mixed resistive and inductive)

**Connection capacity**











- 16mm<sup>2</sup> rigid
- 10mm<sup>2</sup> flexible

**Standards**

Compliant to IEC 60947-3. SFX63 comply to IEC 60669-2-4.

**Technical information: [Page 129](#)**

**Manual Changeover Switches**

| Description   | Characteristics | Width | Cat ref.      |
|---|-----------------|-------|---------------|
| I-II Single pole, 2 ways with bottom common point<br>                              | 1 x 25A 230V~   | 1 mod | <b>SFL125</b> |
| I-II Single pole, 2 ways, 1NO/1NC w/out common point<br>                           | 2 x 25A 230V~   | 1 mod | <b>SFM125</b> |
| I-II Double pole with bottom common point<br>                                    | 2 x 25A 230V~   | 2 mod | <b>SFL225</b> |
| I-O-II Single pole Switches centre - off changeover with top common point<br>    | 1 x 25A 230V~   | 1 mod | <b>SFT125</b> |
| I-O-II Single pole Switches centre - off changeover with top common point<br>    | 1 x 40A 230V~   | 1 mod | <b>SFT140</b> |
| I-O-II Double pole Switches centre - off changeover with top common point<br>    | 2 x 25A 230V~   | 2 mod | <b>SFT225</b> |
| I-O-II Double pole Switches centre - off changeover with top common point<br>    | 2 x 40A 230V~   | 2 mod | <b>SFT240</b> |
| I-O-II Four pole Switches centre - off changeover with top common point<br>      | 4 x 40A 230V~   | 4 mod | <b>SFT440</b> |
| I-O-II Double pole Switches centre - off changeover with bottom common point<br> | 2 x 63A 230V~   | 4 mod | <b>SF263</b>  |
| I-O-II Four pole Switches centre - off changeover with bottom common point<br>   | 4 x 63A 400V~   | 8 mod | <b>SF463</b>  |



SFL125



SFM125



SFT225



SFT440



SF263



SF463

Control & indication

### Description

Provides command signals or program selection in electrical control schemes.

### Connection capacity

- Rigid conductor: 1.5 to 10mm<sup>2</sup>
- Flexible conductor: 1 to 6mm<sup>2</sup>

### Standards

Conform to IEC947-3  
BS EN 60947-3

Isolating voltage: 500V~  
Nominal current: 10-20A



SK602



SK603



SK606

## Selector Switches

| Description  | Characteristics                | Width | Cat ref.     |
|--|--------------------------------|-------|--------------|
| 1 pole selector switch<br>   | 20A 400V~<br>Non spring return | 3 mod | <b>SK600</b> |
| 2 pole selector switch<br>   | 20A 400V~<br>Spring return     | 3 mod | <b>SK601</b> |
| Voltmeter selector<br>3Ph&N<br>- 3 readings between phases<br>- 3 readings between phase & neutral<br>- Null position (no reading)<br>                       | 20A 400V~                      | 3 mod | <b>SK602</b> |
| Ammeter selector<br>- 4 positions<br>- Use in 3Ph&N<br>- Reading by phase<br>- 0 position (no reading)<br>- Should be used with current transformer (CT)<br> | 20A 400V~                      | 3 mod | <b>SK603</b> |
| Step selector switch<br>   | 20A 400V~                      | 3 mod | <b>SK604</b> |
| Key selector switch<br>  | 10A 400V~                      | 3 mod | <b>SK606</b> |
| Spare key<br>For SK606   |                                |       | <b>SK001</b> |

### Description

For remote switching and control of power circuits. Suitable for lighting, heating, ventilation, pumps and home automation.

### Manual override

To set output contacts permanently On or Off – Great for fault finding.

### Night & Day override

Allows the End User to set output contact permanently Off or temporarily On until next switching cycle.

### Specifications:

Coil Voltage:  
230V AC (50Hz)  
24V AC (50Hz)

### Output contacts

1NO, 1NO+1NC, 2NO, 2NC, 2NO+2NC, 3NO, 4NO, 4NC

### Output (Heating) AC1/AC7a (50Hz)

25A, 40A, 63A  
at 230V AC  
4.6kW, 7.3kW, 11.6kW  
at 400V AC  
13.8kW, 22kW, 35kW

### Output (Motor) AC3/AC7b (50Hz)

8.5A, 25A, 32A  
at 230V AC  
880W, 2.6kW, 3.3kW  
at 400V AC  
2.6kW, 7.8kW, 10kW

Technical information: [Page 131](#)

## Contactors

| Type    | Diagram | Coil AC (50Hz) |          | Rated output current |       |               | Cat ref. |
|---------|---------|----------------|----------|----------------------|-------|---------------|----------|
|         |         | Override       | AC1/AC7a | AC3/AC7b             | Width |               |          |
| 1NO     |         | Manual         | 25A      | 8.5A                 | 1 mod | <b>ERC125</b> |          |
|         |         | No             | 25A      | 8.5A                 | 1 mod | <b>ESC125</b> |          |
| 1NO+1NC |         | No             | 25A      | 8.5A                 | 1 mod | <b>ESC227</b> |          |
|         |         | No             | 25A      | 8.5A                 | 1 mod | <b>ESD227</b> |          |
| 2NC     |         | No             | 25A      | 8.5A                 | 1 mod | <b>ESC226</b> |          |
| 2NO     |         | Manual         | 25A      | 8.5A                 | 1 mod | <b>ERC225</b> |          |
|         |         | Manual         | 25A      | 8.5A                 | 1 mod | <b>ERD225</b> |          |
|         |         | Night & Day    | 25A      | 8.5A                 | 1 mod | <b>ETC225</b> |          |
|         |         | No             | 25A      | 8.5A                 | 1 mod | <b>ESC225</b> |          |
|         |         | No             | 25A      | 8.5A                 | 1 mod | <b>ESD225</b> |          |
|         |         | No             | 40A      | 25A                  | 3 mod | <b>ESC240</b> |          |
| 3NO     |         | No             | 25A      | 8.5A                 | 2 mod | <b>ESC325</b> |          |
|         |         | No             | 40A      | 25A                  | 3 mod | <b>ESC340</b> |          |
|         |         | Night & Day    | 40A      | 25A                  | 3 mod | <b>ETC340</b> |          |
| 2NO+2NC |         | No             | 25A      | 8.5A                 | 2 mod | <b>ESC427</b> |          |
|         |         | No             | 63A      | 32A                  | 3 mod | <b>ESC465</b> |          |
| 4NC     |         | No             | 40A      | 25A                  | 3 mod | <b>ESC441</b> |          |
|         |         | No             | 63A      | 32A                  | 3 mod | <b>ESC464</b> |          |
| 4NO     |         | Manual         | 25A      | 8.5A                 | 2 mod | <b>ERC425</b> |          |
|         |         | No             | 25A      | 8.5A                 | 2 mod | <b>ESC425</b> |          |
|         |         | No             | 40A      | 25A                  | 3 mod | <b>ESC440</b> |          |
|         |         | No             | 63A      | 32A                  | 3 mod | <b>ESC463</b> |          |



ERC225



ESC425



ESC463

Control & indication

## Accessories

| Description                     | Characteristics   | Cat ref.      |
|---------------------------------|---|---------------|
| Auxiliary contact (1NO+1NC)<br> | (Leftside fitting - maximum one AUX per contactor device) | <b>ESC080</b> |
| Heat dissipation insert         |   | <b>LZ060</b>  |



LZ060

## Description

Designed to provide customers with a good nights sleep. Remote switching and control of power circuits that are suitable for lighting, heating, ventilation, pumps and home automation

## Manual override

To set output to contacts permanently On or Off – Great for fault finding.

## Night & Day override

Allows the End User to set output contact permanently Off or temporarily On until next switching cycle

## Specifications:

Coil Voltage:  
230V AC (50Hz)

## Output contacts

1NO+1NC, 2NO, 2NC, 2NO+2NC,  
3NO, 3NO+1NC, 4NO, 4NC

## Output AC1/AC7a (50Hz)

25A, 40A, 63A  
at 230V AC  
4.6kW, 7.3kW, 11.6kW  
at 400V AC  
13.8kW, 22kW, 35kW

## Output AC3/AC7b (50Hz)

8.5A, 25A, 32A  
at 230V AC  
880W, 2.6kW, 3.3kW  
at 400V AC  
2.6kW, 7.8kW, 10kW

**Technical information:** [Page 131](#)



ESC425S



ESC463S

## Hum-free Contactors

| Type    | Diagram  | Coil AC (50Hz)<br>or DC | Override | Rated output current |          |       | Cat ref.       |
|---------|--|-------------------------|----------|----------------------|----------|-------|----------------|
|         |  |                         |          | AC1/AC7a             | AC3/AC7b | Width |                |
| 2NO     | <pre> A1 1 3             A2 2 4                     </pre>                     | 230V AC                 | No       | 25A                  | 8.5A     | 1 mod | <b>ESC225S</b> |
|         |  | 230V AC                 | No       | 40A                  | 25A      | 3 mod | <b>ESC240S</b> |
|         |  | 230V AC                 | No       | 63A                  | 32A      | 3 mod | <b>ESC263S</b> |
| 3NO     | <pre> A1 1 3 5                   A2 2 4 6                     </pre>           | 230V AC                 | Manual   | 25A                  | 8.5A     | 2 mod | <b>ESC325S</b> |
|         |  | 230V AC                 | No       | 40A                  | 25A      | 3 mod | <b>ESC340S</b> |
| 3NO+1NC | <pre> A1 1 3 5 7                         A2 2 4 6 8                     </pre> | 230V AC                 | No       | 25A                  | 8.5A     | 2 mod | <b>ESC428S</b> |
| 4NC     | <pre> A1 1 3 5 7                         A2 2 4 6 8                     </pre> | 230V AC                 | No       | 25A                  | 8.5A     | 2 mod | <b>ESC426S</b> |
| 4NO     | <pre> A1 1 3 5 7                         A2 2 4 6 8                     </pre> | 230V AC                 | No       | 25A                  | 8.5A     | 2 mod | <b>ESC425S</b> |
|         |  | 230V AC                 | No       | 40A                  | 25A      | 3 mod | <b>ESC440S</b> |
|         |  | 230V AC                 | No       | 63A                  | 32A      | 3 mod | <b>ESC463S</b> |

## Accessories

| Description                    | Diagram  | Characteristics   | Cat ref.      |
|--------------------------------|--|---|---------------|
| Auxiliary contact<br>(1NO+1NC) | <pre> 11 13             12 14                     </pre> | (Leftside fitting - maximum one AUX per contactor device) | <b>ESC080</b> |
| Heat dissipation insert        |  |   | <b>LZ060</b>  |



LZ060

**Latching Relays Description**

For the control of lighting circuits in private buildings, small industrial buildings and administration buildings. Latching Relays operate when pulsed by a signal voltage. The pulse can be provided via a push button or switch. The first impulse sets the relay into its set (opposite) state, the next impulse returns it to its reset (original) state.

**Connection capacity:**

- Rigid capacity: 1.5 to 10mm<sup>2</sup>
- Flexible capacity: 1 to 6mm<sup>2</sup>

**Interface Relay description**

To interface between low voltage and extra low voltage circuits to ensure galvanic insulation between LV and ELV to 4kV.

Ideal as an Interface between fire alarm, burglar alarm and other ELV systems and main distribution circuits.

**Connection capacity**

- 6mm<sup>2</sup> rigid cables
- 4mm<sup>2</sup> flexible cables

**Technical information:** [Page 135](#)

**Latching Relays**


| Description | Coil 50/60Hz V ac | Coil V dc | Power circuit AC1 | Width | Cat ref.      |
|-------------|-------------------|-----------|-------------------|-------|---------------|
| 1NO         | 230V ac           | 110V dc   | 16A-250V          | 1 mod | <b>EPE510</b> |
| 1NO + 1NC   | 230V ac           | 110V dc   | 16A-250V          | 1 mod | <b>EPE515</b> |
| 2NO         | 230V ac           | 110V dc   | 16A-250V          | 1 mod | <b>EPE520</b> |
| 2NO         | 24V ac            | 12V dc    | 16A-250V          | 1 mod | <b>EPE524</b> |



EPE510

**Interface Relay ELV/LV 1 way**

| Description          | Characteristics   | Width | Cat ref.     |
|----------------------|---|-------|--------------|
| Output: 1 changeover | Coil voltage: 10 to 26V AC/DC<br><br>Contact<br>max. 5A 230V~ -<br>min. 10mA - 12V DC | 1 mod | <b>EN145</b> |



EN145



### Description

2 versions:  
 - Impulse push buttons  
 - Latching push buttons  
 The versions with indicator lights are equipped with green or red diffuser (LED technology).

### Connection capacity

- 10mm<sup>2</sup> rigid cables
- 6mm<sup>2</sup> flexible cables

### Standards

- IEC60947-5-1 for push buttons
- IEC62094-1 for indicator lights



SVN391M

### Push Buttons impulse without indicator light 16A - 250V~

| Description | Characteristics                   | Width | Cat ref.       |
|-------------|-----------------------------------|-------|----------------|
|             | Contacts: 1NO                     | 1 mod | <b>SVN311M</b> |
|             | Contacts: 1NC                     | 1 mod | <b>SVN321M</b> |
|             | Contacts: 1NO+1NC<br>(stop/start) | 1 mod | <b>SVN391M</b> |



SVN422M

### Push Buttons impulse with indicator light

| Description | Characteristics     | Width | Cat ref.       |
|-------------|---------------------|-------|----------------|
|             | Contacts: 1NO green | 1 mod | <b>SVN411M</b> |
|             | Contacts: 1NC red   | 1 mod | <b>SVN422M</b> |



SVN311M

### Push Buttons latching without indicator light 16A - 250V~

| Description | Characteristics   | Width | Cat ref.       |
|-------------|-------------------|-------|----------------|
|             | Contacts: 1NO     | 1 mod | <b>SVN312M</b> |
|             | Contacts: 1NO+1NC | 1 mod | <b>SVN352M</b> |



SVN413M

### Push Buttons latching with indicator light

| Description | Characteristics     | Width | Cat ref.       |
|-------------|---------------------|-------|----------------|
|             | Contacts: 1NO green | 1 mod | <b>SVN413M</b> |

**Description**

Used for remote controlling signalisation of any event in any electric installation (residential, tertiary & industrial).

**Features**

- LED technology providing longer life
- new design and integrated label holder.


**Connection capacity**

- 10mm<sup>2</sup> rigid cable
- 6mm<sup>2</sup> flexible cable

**Standards**

- IEC62094-1 for indicator lights

**Indicator Lights**

| Description   | Characteristics | Width | Cat ref.       |
|---|-----------------|-------|----------------|
| With light 230V~<br> | 1 x green       | 1 mod | <b>SVN121M</b> |
|   | 1 x red         | 1 mod | <b>SVN122M</b> |
|   | 1 x blue        | 1 mod | <b>SVN124M</b> |
|   | 1 x clear       | 1 mod | <b>SVN125M</b> |
|   | 3 x red         | 1 mod | <b>SVN127M</b> |



SVN122M, SVN125M, SVN124M



SVN121M, SVN122M, SVN127M

**DIN Socket Outlets**

| Description  | Characteristics | Width   | Cat ref.       |
|--|-----------------|---------|----------------|
| DIN mounted, double pole, auto switched complete with safety shutters and 'ON' indicator | 10A             | 2.5 mod | <b>SNO10DA</b> |
|  | 15A             | 2.5 mod | <b>SNO15DA</b> |



SNO15DA

Control & indication

### Description

Provides safety for extra low voltage 8, 12, 24V~.

### Technical data

- Secondary voltage: 8V, 12V, 24V
- Bell transformers are short circuit protected
- Bells/buzzers: Maximum continuous duty  $\leq 30$ min

### Connection capacity

- Cable clamp type

### Output

- Bells: 85dBA
- Buzzers: 78dBA

When a bell transformer is installed in an enclosure with mains voltage equipment, 230V cable should be used on the secondary side of the transformer or extra low voltage cable should be sheathed within the enclosure.

### Note

The transformers have a higher no load voltage. The stated voltages correspond to the voltages at nominal load

Technical information: [Page 136](#)



ST312

### Safety Transformers

| Description   | Characteristics | Width | Cat. ref.    |
|---|-----------------|-------|--------------|
| Frequency: 50/60Hz<br>Primary voltage: 230V<br>Secondary voltage: 12 / 24V~ | 25VA            | 4 mod | <b>ST312</b> |



|      |       |              |
|------|-------|--------------|
| 63VA | 6 mod | <b>ST315</b> |
|------|-------|--------------|



ST303

### Bell Transformers

| Description | Characteristics  | Width | Cat. ref.    |
|-------------|--|-------|--------------|
|             | Frequency: 50/60Hz<br>Primary voltage 230V~ 8VA<br>Secondary voltage: 8V~ 1A<br>12V~ 0.67A | 2 mod | <b>ST303</b> |

|   |       |              |
|---|-------|--------------|
| Frequency: 50/60Hz<br>Primary voltage 230V~ 16VA<br>Secondary voltage: 8V~ 2A<br>12V~ 1.33A | 3 mod | <b>ST305</b> |
|---|-------|--------------|



SU212

### Bells

| Description | Characteristics        | Width | Cat. ref.    |
|-------------|------------------------|-------|--------------|
|             | 8/12V~<br>4VA - 0.35A  | 1 mod | <b>SU212</b> |
|             | 230V~<br>6.5VA - 0.03A | 1 mod | <b>SU213</b> |



SU214

### Buzzers

| Description | Characteristics        | Width | Cat. ref.    |
|-------------|------------------------|-------|--------------|
|             | 8/12V~<br>4VA - 0.35A  | 1 mod | <b>SU214</b> |
|             | 230V~<br>6.5VA - 0.03A | 1 mod | <b>SU215</b> |

**Description**

Our Emergency Lighting Discharge Test Package has been developed to meet the needs of the electrical industry. In accordance with AS2293.1, 'Emergency Evacuation Lighting for Buildings', a discharge test circuit MUST be installed in both existing and new installations for the purpose of testing the charge. The test facility must also be able to be reset manually.

**Application**

The wired 'off-the-shelf' package may be mounted using the supplied enclosure where space in the switchboard is limited. It can also be installed in the Hager range of performa Panelboards by taking advantage of the DIN rail area at the top of the switchboard.

**Use and implementation**

Upon engaging the Green push button for 1 second, the timer starts it's operation and energises the contactor coil. The four normally closed contacts open, initiating operation of the emergency lights. The timer, to be set at 2hrs (for initial commissioning, 90mins thereafter), completes its operation, de-energising the contactor coil returning the contacts to the normally closed position. If the red push button is pressed the timer resets and is ready for the green push button to start the timing cycle again.

Technical information: [Page 136](#)

**Emergency Lighting Discharge Test Packages - Wired**

| Description   | Characteristics   | Cat ref.       |
|---|---|----------------|
| Emergency test package 1<br>- Wired in enclosure<br>- For use as standalone<br>- 4 circuits                               | Includes:<br>- 6 pole surface mount IP40 enclosure with a lockable door<br>- 4 Pole 40A N/C Contactor<br>- Push button 1N/O (green) + 1N/C (red)<br>- Delay timer 0.1sec to 10hrs | <b>EMERG1W</b> |
| Emergency test package 2<br>- Wired in enclosure<br>- For use as standalone<br>- 2 circuits                               | Includes:<br>- 4 pole surface mount IP40 enclosure with a lockable door<br>- 2 Pole 25A N/C Contactor<br>- Push button 1N/O (green) + 1N/C (red)<br>- Delay timer 0.1sec to 10hrs | <b>EMERG2W</b> |
| Emergency test package 3<br>- Wired without enclosure<br>- For use in panelboards and/or other enclosures<br>- 4 circuits | Includes:<br>- 4 Pole 40A N/C Contactor<br>- Push button 1N/O (green) + 1N/C (red)<br>- Delay timer 0.1sec to 10hrs   | <b>EMERG3W</b> |
| Emergency test package 4<br>- Wired without enclosure<br>- For use in panelboards and/or other enclosures<br>- 2 circuits | Includes:<br>- 2 Pole 25A N/C Contactor<br>- Push button 1N/O (green) + 1N/C (red)<br>- Delay timer 0.1sec to 10hrs   | <b>EMERG4W</b> |



EMERG2W and EMERG1W



EMERG3W

## Electrical characteristics

| Family  | SBRx40      | SBRx64      | SBRx80      | SBRx90      | SBR399      | ESC080      |
|---|-------------|-------------|-------------|-------------|-------------|-------------|
| Thermal current I <sub>th</sub> (40°C)              | 40A         | 63A         | 80A         | 100A        | 125A        | -           |
| Operational frequency                               | 50/60Hz     | 50/60Hz     | 50/60Hz     | 50/60Hz     | 50/60Hz     | 50Hz        |
| Rated insulation voltage (U <sub>i</sub> )          | 440V        | 440V        | 440V        | 440V        | 440V        | 240V        |
| Rated impulse withstand voltage (U <sub>imp</sub> ) | 6kV         | 6kV         | 6kV         | 6kV         | 6kV         | 4kV         |
| Protection degree                                   | 3           | 3           | 3           | 3           | 3           | 2           |
| Working temperature                                 | -20 to 50°C | -20 to 50°C | -20 to 50°C | -20 to 50°C | -20 to 50°C | -10 to 50°C |
| Storage temperature                                 | -40 to 80°C | -40 to 80°C | -40 to 80°C | -40 to 80°C | -40 to 80°C | -40 to 80°C |

## Operational currents I<sub>e</sub> (AS/NZS IEC 60947-3)

| Utilisation category | Rated voltage | SBRx40 | SBRx64 | SBRx80 | SBRx90 | SBR399 | ESC080 |
|----------------------|---------------|--------|--------|--------|--------|--------|--------|
| AC 21A/B             | 230-400V AC   | 40A    | 63A    | 80A    | 100A   | 125A   | -      |
| AC 22A/B             | 230-400V AC   | 40A    | 63A    | 80A    | 100A   | 125A   | -      |

A category = Frequent operation

B category = Infrequent operation

## Short circuit characteristics

| Rated short time withstand current 1s (I <sub>cw</sub> ) (rms) | IEC 60947-3 | SBRx40                   | SBRx64 | SBRx80 | SBRx90 | SBR399 | ESC080 |
|--|-------------|--------------------------|--------|--------|--------|--------|--------|
| Rated short circuit making capacity (I <sub>cm</sub> )         | IEC 60669   | 6kA with 40A MCB C curve | -      | -      | -      | -      | -      |

## Mechanical characteristics

|  |                   |                   |                   |                   |                   |                   |                   |
|--|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Rigid cable section                            | 25mm <sup>2</sup> | 50mm <sup>2</sup> | 50mm <sup>2</sup> | 50mm <sup>2</sup> | 50mm <sup>2</sup> | 50mm <sup>2</sup> | 10mm <sup>2</sup> |
| Flexible cable section                         | 16mm <sup>2</sup> | 35mm <sup>2</sup> | 35mm <sup>2</sup> | 35mm <sup>2</sup> | 35mm <sup>2</sup> | 35mm <sup>2</sup> | 6mm <sup>2</sup>  |
| Tightening torque                              | 2.8Nm             | 3.6Nm             | 3.6Nm             | 3.6Nm             | 3.6Nm             | 3.6Nm             | 3.6Nm             |
| IP protection degree                           | 20                | 20                | 20                | 20                | 20                | 20                | 20                |
| Mechanical endurance (number of cycles)        | 60,000            | 40,000            | 40,000            | 40,000            | 40,000            | 40,000            | 1,000,000         |
| Electrical endurance @ AC22 (number of cycles) | 5,000             | 2,500             | 2,500             | 2,500             | 2,500             | 2,500             | 60,000            |

## Overall dimensions

| Overall dimensions | No. of poles |    |    |    |    |    |           |
|--------------------|--------------|----|----|----|----|----|-----------|
|                    | 1P           | 2P | 3P | 4P | 5P | 6P | 7P        |
| Width (mm)         | 17.5         | 36 | 53 | 72 | 72 | 72 | 1/2P 8.75 |
| Height (mm)        | 83           | 83 | 83 | 83 | 83 | 83 | 83        |
| Depth (mm)         | 72           | 72 | 72 | 72 | 72 | 72 | 60        |

## Electrical characteristics

| Family   | SF          |             |             |             |             |             |             |             |             |             |
|--|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Reference  | SFL125      | SFM125      | SFL225      | SFT125      | SFT140      | SFT225      | SFT240      | SFT440      | SF263       | SF463       |
| Type   | I-II        | I-II        | I-II        | I-O-II      | I-O-II      | I-O-II      | I-O-II      | I-O-II      | I-O-II      | I-O-II      |
| Modular size                                     | 1 module    | 1 module    | 2 module    | 1 module    | 1 module    | 2 module    | 2 module    | 4 module    | 4 module    | 8 module    |
| Number of Poles                                  | 1P          | 1P          | 2P          | 1P          | 1P          | 2P          | 2P          | 4P          | 2P          | 4P          |
| Thermal current I <sub>th</sub> (40°C)           | 25A         | 25A         | 25A         | 25A         | 40A         | 25A         | 40A         | 40A         | 63A         | 63A         |
| Operational frequency                            | 50/60Hz     | 50/60Hz     | 50/60Hz     | 50/60Hz     | 50/60Hz     | 50/60Hz     | 50/60Hz     | 50/60Hz     | 50/60Hz     | 50/60Hz     |
| Rated operation voltage in AC                    | 230V        | 230V        | 230V        | 230V        | 230V        | 230V        | 230V        | 400V        | 230V        | 400V        |
| Rated insulation voltage (U <sub>i</sub> )       | 440V        | 440V        | 440V        | 440V        | 440V        | 440V        | 440V        | 440V        | 500V        | 500V        |
| Rated impulse withstand voltage U <sub>imp</sub> | 4kV         | 4kV         | 4kV         | 4kV         | 4kV         | 4kV         | 4kV         | 4kV         | 4kV         | 4kV         |
| Protection degree                                | 2           | 2           | 2           | 2           | 2           | 2           | 2           | 2           | 2           | 2           |
| Working temperature                              | -20 to 50°C | -20 to 50°C | -20 to 50°C | -20 to 50°C | -20 to 50°C | -20 to 50°C | -20 to 50°C | -20 to 50°C | -20 to 50°C | -20 to 50°C |
| Storage temperature                              | -40 to 80°C | -40 to 80°C | -40 to 80°C | -40 to 80°C | -40 to 80°C | -40 to 80°C | -40 to 80°C | -40 to 80°C | -40 to 80°C | -40 to 80°C |

## Operational currents I<sub>e</sub> (IEC 60947-3)

| Load duty category | Rated voltage |     |     |     |     |     |     |     |     |     |     |
|--------------------|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| <b>AC 21A</b>      | 230-400V AC   | 25A | 25A | 25A | 25A | 40A | 25A | 40A | 40A | 63A | 63A |
| <b>AC 22A</b>      | 230-400V AC   | 25A | 25A | 25A | 25A | 40A | 25A | 40A | 40A | 40A | 40A |
| <b>AC 22B</b>      | 230-400V AC   | 25A | 25A | 25A | 25A | 40A | 25A | 40A | 40A | 40A | 40A |

A category = Frequent operation

B category = Infrequent operation

## Short circuit characteristics

|   |             |      |      |      |      |      |      |      |      |                            |                            |
|---|-------------|------|------|------|------|------|------|------|------|----------------------------|----------------------------|
| Rated short time withstand current 1s I <sub>cs</sub> (rms) | IEC 60947-3 | 375A | 375A | 375A | 375A | 600A | 375A | 600A | 600A | N/A                        | N/A                        |
| Rate conditional short circuit current (rms)                | IEC 60947-3 | N/A  | N/A  | N/A  | N/A  | N/A  | N/A  | N/A  | N/A  | 4.5kA with 63A MCB C curve | 4.5kA with 63A MCB C curve |

## Mechanical characteristics

|  |                   |                   |                   |                   |                   |                   |                   |                   |                   |                   |                   |
|--|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Rigid cable section (max.)                     | 16mm <sup>2</sup> | 16mm <sup>2</sup> | 16mm <sup>2</sup> | 16mm <sup>2</sup> | 16mm <sup>2</sup> | 16mm <sup>2</sup> | 16mm <sup>2</sup> | 16mm <sup>2</sup> | 16mm <sup>2</sup> | 25mm <sup>2</sup> | 25mm <sup>2</sup> |
| Flexible cable section (max.)                  | 10mm <sup>2</sup> | 10mm <sup>2</sup> | 10mm <sup>2</sup> | 10mm <sup>2</sup> | 10mm <sup>2</sup> | 10mm <sup>2</sup> | 10mm <sup>2</sup> | 10mm <sup>2</sup> | 10mm <sup>2</sup> | 16mm <sup>2</sup> | 16mm <sup>2</sup> |
| Tightening torque                              | 1.8Nm             | 1.8Nm             | 1.8Nm             | 1.8Nm             | 1.8Nm             | 1.8Nm             | 1.8Nm             | 1.8Nm             | 1.8Nm             | 2.9Nm             | 2.9Nm             |
| IP protection degree                           | 20                | 20                | 20                | 20                | 20                | 20                | 20                | 20                | 20                | 20                | 20                |
| Mechanical endurance (number of cycles)        | 200,000           | 200,000           | 200,000           | 200,000           | 200,000           | 200,000           | 200,000           | 200,000           | 200,000           | 100,000           | 100,000           |
| Electrical endurance @ AC22 (number of cycles) | 25,000            | 25,000            | 25,000            | 25,000            | 25,000            | 25,000            | 25,000            | 25,000            | 25,000            | 5,000             | 5,000             |

## Overall dimensions

|             |      |      |    |      |      |    |    |    |      |     |
|-------------|------|------|----|------|------|----|----|----|------|-----|
| Width (mm)  | 17.5 | 17.5 | 35 | 17.5 | 17.5 | 35 | 35 | 70 | 71.5 | 143 |
| Height (mm) | 83   | 83   | 83 | 83   | 83   | 83 | 83 | 83 | 90   | 90  |
| Depth (mm)  | 68   | 68   | 68 | 68   | 68   | 70 | 70 | 70 | 72   | 72  |

## Wiring Diagrams for the use of changeover switches (I-0-II) with stand-by generators


Stand-by generator or Alternative supply generator: typical location of manual changeover device with centre "off" position in the main switch board.

The incoming changeover must be protected with an appropriate MCB 63A - 6kA - C curve to protect against short circuit and disconnection.


NOTE 1: In Australia and NZ, the Main Supply Neutral upstream of the MEN connection is NOT allowed to be switched. (AS/NZS 3010: Electrical installations - Generating sets).

NOTE 2: Refer to AS/NZS 3000, 3010 and local Service and Installation Rules for specific requirements.
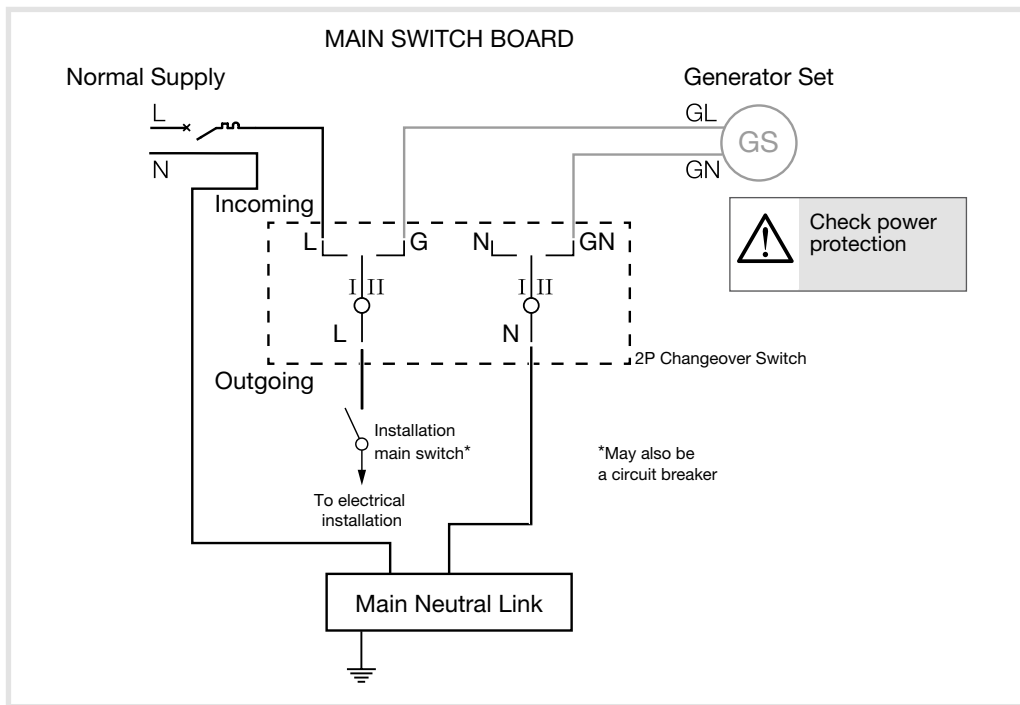
### Single phase SFT2xx, SF263



### Three phase SFT4xx, SF463

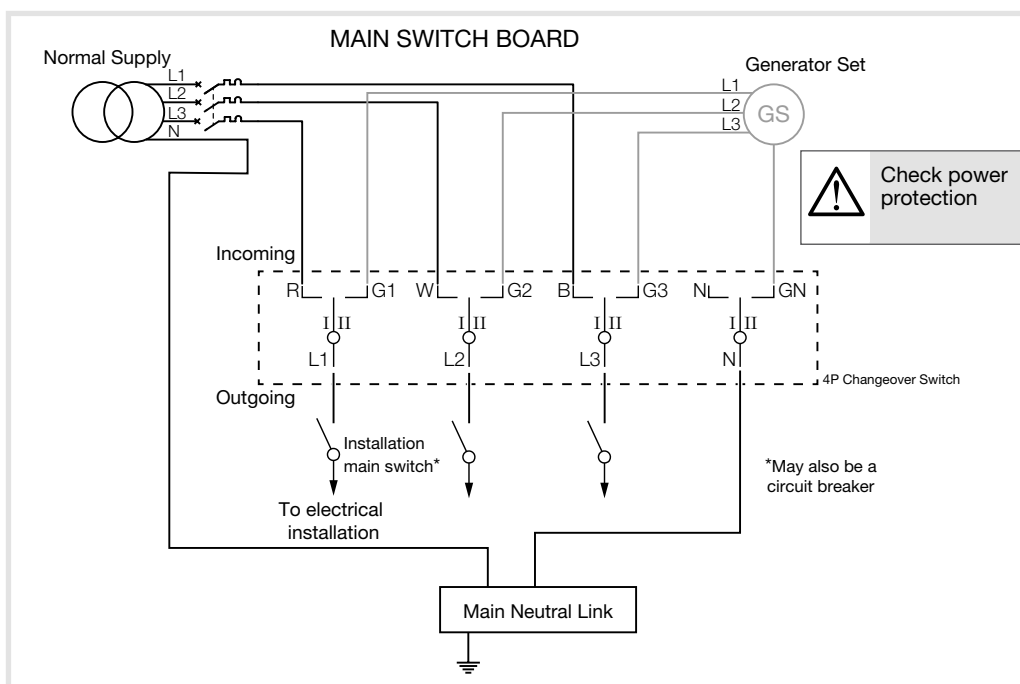

Control & indication

## Electrical Characteristic

|   |                        |      |      |      |              |
|---|------------------------|------|------|------|--------------|
| Type  | ERxxxx, ESxxxx, ETCxxx |      |      |      | ESC080       |
| Description   | Modular contactor      |      |      |      | Aux. contact |
| Standard conformity                                 | IEC/EN 61095           |      |      |      |              |
| Number of module                                    | 1                      | 2    | 3    | 3    | ½            |
| Thermal current I <sub>th</sub> (40°C)              | 25A                    | 25A  | 40A  | 63A  | -            |
| Rated frequency                                     | 50Hz                   | 50Hz | 50Hz | 50Hz | 50Hz         |
| Rated insulation voltage (U <sub>i</sub> )          | 250V                   | 440V | 440V | 440V | 240V         |
| Rated impulse withstand voltage (U <sub>imp</sub> ) | 4kV                    | 4kV  | 4kV  | 4kV  | 4kV          |
| Protection degree (IP rating)                       | 2                      | 2    | 2    | 2    | 2            |

## Rated operating currents & power ratings in AC

|          |   |               |           |       |       |        |
|----------|---|---------------|-----------|-------|-------|--------|
| AC1/AC7a | Rated operating currents I <sub>e</sub> | 25A           | 25A       | 40A   | 63A   | -      |
|          | Rated operating power                   | 230V<br>4.6kW | -         | 4.6kW | 7.3kW | 11.6kW |
| AC3/AC7b | Rated operating currents I <sub>e</sub> | 8.5A          | 8.5A      | 25A   | 32A   | -      |
|          | Rated operating power                   | 230V<br>880W  | 400V<br>- | 880W  | 2.6kW | 3.3kW  |
|          |   |               |           | 7.8kW | 10kW  | -      |

## Mechanical & electrical endurance

|   |                   |           |           |           |           |           |
|---|-------------------|-----------|-----------|-----------|-----------|-----------|
| Mechanical endurance                                      | no. of operations | 1,000,000 | 1,000,000 | 1,000,000 | 1,000,000 | 1,000,000 |
| Electrical endurance @ I <sub>e</sub> AC7a (AC12 for aux) | no. of operations | 60,000    | 60,000    | 60,000    | 60,000    | 60,000    |

## MCB protected short-circuit withstand

|                       |                |                |                 |                 |                 |
|-----------------------|----------------|----------------|-----------------|-----------------|-----------------|
| Associated protection | MCB<br>25A-6kA | MCB<br>25A-6kA | MCB<br>40A-10kA | MCB<br>63A-10kA | MCB<br>6A - 6kA |
|-----------------------|----------------|----------------|-----------------|-----------------|-----------------|

## Power dissipation

|                                    |      |      |      |    |      |
|------------------------------------|------|------|------|----|------|
| Power dissipation per current path | 1.5W | 1.5W | 3.2W | 5W | 0.4W |
|------------------------------------|------|------|------|----|------|

## Magnetic system for standard contactor

|                  |       |        |      |      |   |
|------------------|-------|--------|------|------|---|
| Pick-up          | 7.4VA | 9.2VA  | 60VA | 60VA | - |
| Coil consumption | 1.8VA | 1.85VA | 7VA  | 7VA  | - |
| Closing delay    | 20ms  | 20ms   | 20ms | 20ms | - |
| Opening delay    | 15ms  | 15ms   | 20ms | 20ms | - |

## Magnetic system for Hum free contactor

|                  |      |      |      |      |   |
|------------------|------|------|------|------|---|
| Pick-up          | 2.2W | 2.8W | 5W   | 5W   | - |
| Coil consumption | 2.2W | 2.8W | 5W   | 5W   | - |
| Closing delay    | 25ms | 25ms | 25ms | 25ms | - |
| Opening delay    | 15ms | 15ms | 20ms | 20ms | - |

## Magnetic system for Lighting contactors (control)

|             |                  |       |        |        |        |   |
|-------------|------------------|-------|--------|--------|--------|---|
| Std and eco | Pick-up          | 9.5VA | 16.3VA | 16.3VA | 16.3VA | - |
|             | Coil Consumption | 2.5VA | 3.1VA  | 3.1VA  | 3.1VA  | - |
| Hum-free    | Pick-up          | 2.5VA | 3.2VA  | 3.2VA  | 3.2VA  | - |
|             | Coil Consumption | 2.5VA | 3.2VA  | 3.2VA  | 3.2VA  | - |

## Connection

|                               |                    |                        |                        |                        |                        |                   |
|-------------------------------|--------------------|------------------------|------------------------|------------------------|------------------------|-------------------|
| Main contact cable section    | rigid              | 1 to 10mm <sup>2</sup> | 1 to 10mm <sup>2</sup> | 4 to 25mm <sup>2</sup> | 4 to 25mm <sup>2</sup> | 10mm <sup>2</sup> |
|                               | flexible           | 1 to 6mm <sup>2</sup>  | 1 to 6mm <sup>2</sup>  | 4 to 16mm <sup>2</sup> | 4 to 16mm <sup>2</sup> | 6mm <sup>2</sup>  |
| Main contact connection screw | Type               | M3.4                   | M3.4                   | M5                     | M5                     | M3.4              |
|                               | Posidrive          | PZ2                    | PZ2                    | PZ2                    | PZ2                    | PZ2               |
|                               | Max. tight. torque | 1.2Nm                  | 1.2Nm                  | 3.5Nm                  | 3.5Nm                  | 1.2Nm             |
| Coil connection cable section | rigid              | 1 to 10mm <sup>2</sup> | 1 to 10mm <sup>2</sup> | 1 to 10mm <sup>2</sup> | 1 to 10mm <sup>2</sup> | 6mm <sup>2</sup>  |
|                               | flexible           | 1 to 6mm <sup>2</sup>  | 1 to 6mm <sup>2</sup>  | 1 to 6mm <sup>2</sup>  | 1 to 6mm <sup>2</sup>  | 6mm <sup>2</sup>  |
| Coil connection screw         | Type               | M3.5                   | M3.5                   | M4                     | M4                     | -                 |
|                               | Posidrive          | PZ2                    | PZ2                    | PZ2                    | PZ2                    | -                 |
|                               | Max. tight. torque | 1.2Nm                  | 1.2Nm                  | 2.5Nm                  | 2.5Nm                  | -                 |

|                            |                |                |                |                |                |
|----------------------------|----------------|----------------|----------------|----------------|----------------|
| <b>Working temperature</b> | -10°C to +50°C | -10°C to +50°C | -10°C to +50°C | -10°C to +50°C | -10°C to +50°C |
|----------------------------|----------------|----------------|----------------|----------------|----------------|

|                            |                |                |                |                |                |
|----------------------------|----------------|----------------|----------------|----------------|----------------|
| <b>Storage temperature</b> | -40°C to +80°C | -40°C to +80°C | -40°C to +80°C | -40°C to +80°C | -40°C to +80°C |
|----------------------------|----------------|----------------|----------------|----------------|----------------|



### Choice of Contactors

Knowing the type of application will assist in the selection of suitable contactors. Typical application parameters include ambient operating temperature, the number of operations and the electrical load type (Heating / Motors / Lighting). Taking all into consideration will ensure continuous service and unnecessary call backs.

- **Heating applications:** Suitable for slightly inductive loads such as heating elements or convectors.
- **Motor applications:** Suitable for motor loads such as fans and pool pumps.
- **Lighting loads:** Incandescent, fluorescent and discharge lamps are classified as 'high inrush' due to the higher current draw when first switched on compared to the operating / running current.

The contactors are AC7-a (resistive load) and AC7-b (inductive load) approved.

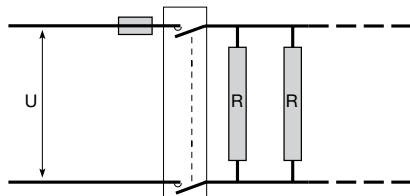
### Adjacent fitting

LZ060 inserts are to be fitted between all contactors and adjacent devices to ensure optimum operation and heat dissipation.


## Heating applications

The choice of the contactor is based on the electrical heating load, and the targeted life time.

### Single phase



### Three phase supply

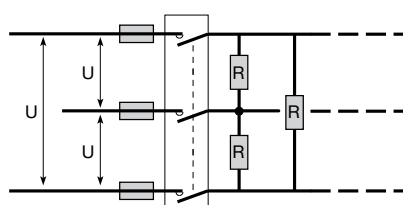

| Rated output voltage                  | Rated output current | AC1/AC7A (maximum load in kilowatts) |         |         |         |        | Operating temps | Derating factor |
|---------------------------------------|----------------------|--------------------------------------|---------|---------|---------|--------|-----------------|-----------------|
|                                       |                      | 1                                    | 1.35    | 3       | 4       | 4.6    |                 |                 |
| 230V AC                               | 25A                  | 1                                    | 1.35    | 3       | 4       | 4.6    | Up to 40°C      | 1               |
|                                       | 40A                  | 1.6                                  | 2.2     | 4.7     | 6.3     | 7.3    |                 |                 |
|                                       | 63A                  | 2.5                                  | 3.5     | 7.5     | 10      | 11.6   | 40o - 50°C      | 0.9             |
| 400V AC                               | 25A                  | 3                                    | 4.3     | 8.6     | 12      | 13.8   |                 |                 |
|                                       | 40A                  | 5                                    | 6.3     | 14.385  | 18 500  | 22     |                 |                 |
|                                       | 63A                  | 7.6                                  | 10.2    | 22.6    | 30      | 35     |                 |                 |
| <b>No. of operations (# see note)</b> |                      | 600 000                              | 300 000 | 150 000 | 100 000 | 60 000 |                 |                 |

#NOTE: 1 opening +1 closing contact = 2 operations. \*On three phase configuration the maximum load per phase corresponds to the values stated divided by 3.

### Example application: 4kW (230V AC) heating element ie. AC1/AC7a load

Determine suitability of ESC225 (2 pole, 25A) using load calculation with temperature derating. According to data sheet for AC1/AC7a load on ESC225 – (1 module 25A) the rated operational current (Ie) = 25A, maximum load = 4.6kW (230 VAC)

Assume operating temperature = 48°C

The maximum load switching capacity at 48°C is calculated as follows: Maximum Load x Derating factor = 4.6kW x 0.9 = 4.14kW

Thus, ESC225 is suitable for a 4kW heating element operating at 48°C maximum.

### Duty cycle or durability

The number of reliable operations of ESC225 (2 pole, 25A) contactor depends on the connected load.

- Connected to 1kW (230V AC) load = 600,000 operations
- Connected to 3kW (230V AC) load = 150,000 operations
- Connected to 4kW (230V AC) load = 100,000 operations

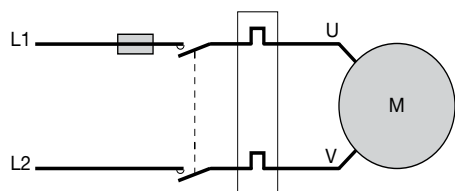
How long will ESC225 (25A) connected to 4kW load last ?

- At 100 operations per day it will last a minimum of 1000 days (ie 100,000 ÷ 100 = 1000 days).
- At 500 operations per day it will last a minimum of 200 days (ie 100,000 ÷ 500 = 200 days).

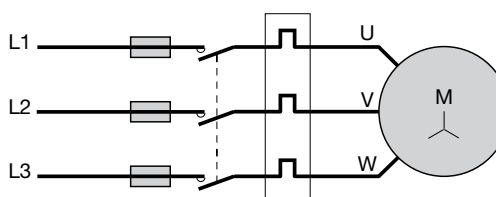
If higher durability is required, the contactor can be up-sized to a higher current rating.

## Motor applications (AC7-b equivalent to AC3)

### Single phase 230V






### Three phase 400V





|                                    | Contactor rating     |                     | Control diagram      |                     |
|------------------------------------|----------------------|---------------------|----------------------|---------------------|
|                                    | 2P 230V single phase | 3P 400V three phase | 2P 230V single phase | 3P 400V three phase |
| <b>Maximum power for the motor</b> | 16A                  | 1.7 kW              | 0.57 kW              | 1.7 kW              |
|                                    | 25A                  | 2.65 kW             | 0.88 kW              | 2.65 kW             |
|                                    | 40A                  | 7.8 kW              | 2.6 kW               | 7.8 kW              |
|                                    | 63A                  | 10 kW               | 3.3 kW               | 10 kW               |

Modern lighting systems generate high inrush currents. Therefore we recommend to use the table below to calculate the maximum number of lamps (or dual fittings) which can be connected to each pole of a Hager contactor on 230V 50Hz circuits.







- From June 2014, Hager has improved the performance of 1 and 2 module contactors. The products identified on the front face with the pictogram  can accept a higher number of lamps.

|   |  | Lamp wattage (W) | Rated output (per pole) |     |     |
|---|--|------------------|-------------------------|-----|-----|
|   |  |                  | 25A '+'                 | 40A | 63A |
|  | CFL with external electronic ballast   | 5 - 7            | 27                      | 49  | 76  |
|   |  | 9 - 11           | 26                      | 40  | 63  |
|   |  | 15 - 26          | 22                      | 36  | 57  |
|  | CFL with integrated electronic ballast | 5 - 15           | 54                      | 86  | 135 |
|   |  | 18 - 26          | 40                      | 63  | 100 |

#### Incandescent lamps

|   |   |      |    |     |     |
|---|---|------|----|-----|-----|
|  | Tungsten Halogen Lamps 230V                         | 40   | 57 | 76  | 120 |
|   |   | 60   | 45 | 67  | 105 |
|   |   | 75   | 38 | 63  | 100 |
|   |   | 100  | 28 | 41  | 65  |
|   |   | 150  | 18 | 29  | 45  |
|   |   | 200  | 14 | 22  | 35  |
|   |   | 300  | 10 | 15  | 23  |
|   |   | 500  | 6  | 9   | 14  |
|  | Halogen ELV (12 or 24V) with electronic transformer | 1000 | 2  | 4   | 7   |
|   |   | 20   | 40 | 139 | 218 |
|   |   | 35   | 26 | 82  | 129 |
|   |   | 50   | 18 | 60  | 94  |
|   |   | 75   | 12 | 52  | 82  |
|   |   | 100  | 6  | 35  | 55  |
|   |   | 150  | 4  | 20  | 31  |

#### Fluorescent tubes (T5)

|   |  |   |   |             |     |    |    |
|---|--|---|---|-------------|-----|----|----|
|  | Single - with starter<br>(Low power factor <0.9) | 15 - 20   | 30  | 70          | 100 |    |    |
|   |  | 36  | 28  | 60          | 90  |    |    |
|   |  | 40  | 26  | 60          | 90  |    |    |
|   |  | 42  | 24  | 55          | 83  |    |    |
|   |  | 58-65   | 17  | 35          | 56  |    |    |
|   |  | 80  | 15  | 30          | 48  |    |    |
|   |  | 115   | 10  | 20          | 32  |    |    |
|   |  | 140   | 10  | 16          | 26  |    |    |
|   |  |  | Single - with starter<br>(High power factor >0.9) | 15 - 20     | 20  | 36 | 57 |
|   |  |   |   | 36          | 20  | 34 | 53 |
| 40 - 42   | 20   |   |   | 29          | 45  |    |    |
| 58 - 80   | 15   |   |   | 27          | 42  |    |    |
| 115   | 15   |   |   | 25          | 39  |    |    |
| 2 x 18  | 40   |   |   | 50          | 78  |    |    |
| 2 x 20  | 38   |   |   | 50          | 78  |    |    |
| 2 x 36  | 30   |   |   | 44          | 69  |    |    |
|  | Double - with starter<br>(Low power factor <0.9) | 2 x 40  | 26  | 40          | 63  |    |    |
|   |  | 2 x 42  | 24  | 40          | 63  |    |    |
|   |  | 2 x 58  | 18  | 27          | 42  |    |    |
|   |  | 2 x 65  | 16  | 27          | 42  |    |    |
|   |  | 2 x 80  | 14  | 22          | 35  |    |    |
|   |  | 2 x 115   | 10  | 16          | 25  |    |    |
|   |  | 2 x 18  | 22  | 34          | 53  |    |    |
|   |  | 2 x 20  | 22  | 29          | 45  |    |    |
|   |  |  | Double - with starter<br>(High power factor >0.9) | 2 x 36 - 42 | 20  | 27 | 42 |
|   |  |   |   | 2 x 58      | 20  | 25 | 39 |
| 2 x 65  | 14   |   |   | 23          | 36  |    |    |
| 2 x 80  | 14   |   |   | 20          | 31  |    |    |
| 2 x 115   | 10   |   |   | 17          | 25  |    |    |
| 15 - 20   | 22   |   |   | 36          | 57  |    |    |
| 36  | 22   |   |   | 34          | 53  |    |    |
|  | Single with electronic ballast                   | 40 - 42   | 22  | 29          | 45  |    |    |
|   |  | 58 - 80   | 20  | 27          | 42  |    |    |
|   |  | 115   | 20  | 25          | 39  |    |    |
|   |  | 2 x 18  | 22  | 34          | 53  |    |    |
|  | Double with electronic ballast                   | 2 x 20  | 22  | 29          | 45  |    |    |
|   |  | 2 x 36 - 42   | 20  | 27          | 42  |    |    |
|   |  | 2 x 58  | 20  | 25          | 39  |    |    |
|   |  | 2 x 65  | 14  | 23          | 36  |    |    |
|   |  | 2 x 80  | 14  | 20          | 31  |    |    |
|   |  | 2 x 115   | 10  | 17          | 25  |    |    |

The information given below should be considered as indicative and is provided on an "as is" basis. Considerable variations may occur depending on the electrical installation and equipment used. Only experienced professionals with the expertise to determine the characteristics of the electrical installation (value and duration of inrush currents, general characteristics of the installation, types of loads, etc.) may approve and implement a configuration, in accordance with the currently applicable installation standards. Hager accepts no liability for the use made of this information.

| Discharge lamps |  | Lamp wattage (W) | Rated output (per pole)                                |         |     |    |     |
|-----------------|--|------------------|--|---------|-----|----|-----|
|                 |  |                  | 25A '+'  | 40A     | 63A |    |     |
|                 | High pressure mercury vapour lamps<br>(Low power factor <0.9)  | 50               | 28   | 32      | 50  |    |     |
|                 |  | 80               | 18   | 24      | 37  |    |     |
|                 |  | 125              | 10   | 18      | 28  |    |     |
|                 |  | 250              | 6  | 10      | 15  |    |     |
|                 |  | 400              | 2  | 6       | 9   |    |     |
|                 |  | 700              | 0  | 4       | 5   |    |     |
|                 |  | 50               | 22   | 26      | 40  |    |     |
|                 |  | 80               | 16   | 22      | 34  |    |     |
|                 |  | 125              | 10   | 15      | 23  |    |     |
|                 |  | 250              | 6  | 9       | 14  |    |     |
|                 | High pressure mercury vapour lamps<br>(High power factor >0.9) | 400              | 2  | 5       | 8   |    |     |
|                 |  | 700              | 0  | 3       | 5   |    |     |
|                 |  | 1000             | 0  | 2       | 3   |    |     |
|                 |  | 18               | 20   | 18      | 21  |    |     |
|                 |  | 35 - 55          | 9  | 14      | 20  |    |     |
|                 |  | 90               | 6  | 9       | 14  |    |     |
|                 |  | 135 - 180        | 4  | 6       | 8   |    |     |
|                 |  | 18               | 8  | 12      | 24  |    |     |
|                 |  | 35               | 7  | 10      | 23  |    |     |
|                 |  | 55               | 5  | 10      | 19  |    |     |
|                 | Low pressure sodium vapour lamps<br>(High power factor >0.9)   | 90               | 4  | 8       | 16  |    |     |
|                 |  | 135              | 2  | 5       | 7   |    |     |
|                 |  | 180              | 2  | 5       | 6   |    |     |
|                 |  | 35               | 24   | 30      | 50  |    |     |
|                 |  | 50               | 15   | 22      | 34  |    |     |
|                 |  | 70               | 12   | 18      | 28  |    |     |
|                 |  | 110              | 10   | 14      | 22  |    |     |
|                 |  | 150              | 8  | 10      | 16  |    |     |
|                 |  | 250              | 5  | 6       | 10  |    |     |
|                 |  | 400              | 2  | 4       | 6   |    |     |
|                 | High Pressure sodium lamps<br>(Low power factor <0.9)          | 1000             | 1  | 2       | 3   |    |     |
|                 |  | 35               | 18   | 31      | 50  |    |     |
|                 |  | 50               | 18   | 22      | 35  |    |     |
|                 |  | 70               | 12   | 16      | 25  |    |     |
|                 |  | 110              | 8  | 13      | 21  |    |     |
|                 |  | 150              | 6  | 8       | 13  |    |     |
|                 |  | 250              | 4  | 7       | 11  |    |     |
|                 |  | 400              | 2  | 5       | 8   |    |     |
|                 |  | 1000             | 1  | 2       | 3   |    |     |
|                 |  |                  | High Pressure sodium lamps<br>(High power factor >0.9) | 35      | 30  | 42 | 55  |
| 70              | 17   |                  |  | 26      | 36  |    |     |
| 150             | 12   |                  |  | 14      | 20  |    |     |
| 250             | 8  |                  |  | 9       | 14  |    |     |
| 400             | 4  |                  |  | 6       | 9   |    |     |
| 1000            | 0  |                  |  | 3       | 5   |    |     |
| 35              | 18   |                  |  | 22      | 39  |    |     |
| 70              | 13   |                  |  | 22      | 39  |    |     |
| 150             | 8  |                  |  | 12      | 22  |    |     |
| 250             | 7  |                  |  | 9       | 16  |    |     |
|                 | Metal - Halide Lamp<br>(Low power factor <0.9)                 | 400              | 2  | 5       | 7   |    |     |
|                 |  | 1000             | 1  | 2       | 3   |    |     |
|                 |  | 35               | 18   | 22      | 39  |    |     |
|                 |  | 70               | 13   | 22      | 39  |    |     |
|                 |  | 150              | 8  | 12      | 22  |    |     |
|                 |  | 250              | 7  | 9       | 16  |    |     |
|                 |  | 400              | 2  | 5       | 7   |    |     |
|                 |  | 1000             | 1  | 2       | 3   |    |     |
|                 |  |                  | Metal - Halide Lamp<br>(High power factor >0.9)        | 4 - 12  | 54  | 86 | 135 |
|                 |  |                  |  | 17 - 22 | 40  | 63 | 101 |
| 30 - 40         | 28   |                  |  | 44      | 70  |    |     |
| 50              | 22   |                  |  | 35      | 55  |    |     |
| 4 - 12          | 120  |                  |  | 159     | 250 |    |     |
| 17 - 22         | 88   |                  |  | 118     | 185 |    |     |
| 30 - 40         | 62   |                  |  | 82      | 130 |    |     |
| 50              | 48   |                  |  | 65      | 102 |    |     |
| 100             | 5  |                  |  | 6       | 9   |    |     |
| 150             | 3  |                  |  | 4       | 6   |    |     |
| 200             | 2  | 4                | 6  |         |     |    |     |
|                 | LED 230V integrated driver<br>Dimmable, GU10                   | 1 - 5            | 120  | 180     | 220 |    |     |
|                 |  | 7 - 10           | 120  | 160     | 200 |    |     |
|                 |  | 15               | 88   | 160     | 200 |    |     |
|                 | LED high bay lighting<br>230V integrated driver                | 1 - 5            | 120  | 180     | 220 |    |     |
|                 |  | 7 - 10           | 120  | 160     | 200 |    |     |
|                 |  | 15               | 88   | 160     | 200 |    |     |
|                 | LED 12V external driver Dimmable                               | 1 - 5            | 120  | 180     | 220 |    |     |
|                 |  | 7 - 10           | 120  | 160     | 200 |    |     |
|                 |  | 15               | 88   | 160     | 200 |    |     |

## Electrical characteristics

| Family                          | EPE           |               |               |               |
|---------------------------------|---------------|---------------|---------------|---------------|
| Reference                       | EPE510        | EPE515        | EPE520        | EPE524        |
| Modular size                    | 1 module      | 1 module      | 1 module      | 1 module      |
| Number of contacts              | 1             | 2             | 2             | 2             |
| Type of contacts                | 1NO           | 1NC + 1NO     | 2NO           | 2NO           |
| Contact rating AC1              | 16A           | 16A           | 16A           | 16A           |
| Rated operation voltage in AC   | 230V          | 230V          | 230V          | 24V           |
| Rated operation voltage in DC   | 110V          | 110V          | 110V          | 12V           |
| Operational frequency           | 50/60Hz       | 50/60Hz       | 50/60Hz       | 50/60Hz       |
| Rated insulation voltage (Ui)   | 250V          | 250V          | 250V          | 250V          |
| Power consumption               | 25 VA         | 25 VA         | 25 VA         | 25 VA         |
| Power dissipation per contact   | 1.2W          | 1.2W          | 1.2W          | 1.2W          |
| Min duration of command impulse | 50ms          | 50ms          | 50ms          | 50ms          |
| Max duration of command impulse | 60s           | 60s           | 60s           | 60s           |
| Current at rest                 | 6mA           | 6mA           | 6mA           | 6mA           |
| Working temperature             | -5°C to 40°C  | -5°C to 40°C  | -5°C to 40°C  | -5°C to 40°C  |
| Storage temperature             | -40°C to 80°C | -40°C to 80°C | -40°C to 80°C | -40°C to 80°C |

## Mechanical characteristics

|  |                          |                          |                          |                          |
|--|--------------------------|--------------------------|--------------------------|--------------------------|
| Rigid cable section                            | 1.5 to 10mm <sup>2</sup> | 1.5 to 10mm <sup>2</sup> | 1.5 to 10mm <sup>2</sup> | 1.5 to 10mm <sup>2</sup> |
| Flexible cable section                         | 1 to 6mm <sup>2</sup>    | 1 to 6mm <sup>2</sup>    | 1 to 6mm <sup>2</sup>    | 1 to 6mm <sup>2</sup>    |
| Tightening torque                              | 1.6Nm                    | 1.6Nm                    | 1.6Nm                    | 1.6Nm                    |
| IP protection degree                           | 20                       | 20                       | 20                       | 20                       |
| Mechanical endurance (number of cycles)        | 500,000                  | 500,000                  | 500,000                  | 500,000                  |
| Electrical endurance @ AC22 (number of cycles) | 150,000                  | 150,000                  | 150,000                  | 150,000                  |

## Overall dimensions

|             |      |      |      |      |
|-------------|------|------|------|------|
| Width (mm)  | 17.5 | 17.5 | 17.5 | 17.5 |
| Height (mm) | 83   | 83   | 83   | 83   |
| Depth (mm)  | 63   | 63   | 63   | 63   |

## Utilisation Advice

The following tables show the number of lamps that can be connected per phase at 230V 50Hz

### Incandescent lamps

| Tungsten filament and 230V halogen                  | Power    | 40W | 60W | 75W | 100W | 150W | 200W | 300W | 500W | 1000W |
|---|----------|-----|-----|-----|------|------|------|------|------|-------|
|   | Max. No. | 45  | 30  | 24  | 18   | 12   | 9    | 5    | 3    | 2     |
| ELV halogen (12 or 24V) with electronic transformer | Power    | 20W | 50W | 75W | 100W | 150W | 300W |      |      |       |
|   | Max. No. | 70  | 28  | 19  | 14   | 9    | 3    |      |      |       |

### Fluorescent tubes

|  |                            |       |       |       |       |       |       |  |  |  |
|--|----------------------------|-------|-------|-------|-------|-------|-------|--|--|--|
| Non compensated - single (no capacitor)                        | Power                      | 15W   | 18W   | 30W   | 36W   | 58W   |       |  |  |  |
|  | Max. No.                   | 29    | 25    | 25    | 24    | 14    |       |  |  |  |
| Parallel compensated - single (capacitor added)                | Power                      | 15W   | 18W   | 30W   | 36W   | 58W   |       |  |  |  |
|  | Max. No.                   | 27    | 27    | 25    | 25    | 16    |       |  |  |  |
|  | C total max <sup>(a)</sup> | 121µF | 121µF | 112µF | 112µF | 72µF  |       |  |  |  |
| Series compensated - double (capacitor added)                  | Power                      | 2x18W | 2x20W | 2x36W | 2x40W | 2x58W | 2x65W |  |  |  |
|  | Max. No.                   | 40    | 40    | 22    | 22    | 12    | 12    |  |  |  |
|  | C total max <sup>(a)</sup> | 2.7µF | 2.7µF | 3.4µF | 3.4µF | 5.3µF | 5.3µF |  |  |  |
| Electronic ballast - single                                    | Power                      | 18W   | 36W   | 58W   |       |       |       |  |  |  |
|  | Max. No.                   | 30    | 26    | 15    |       |       |       |  |  |  |
| Electronic ballast - double                                    | Power                      | 2x18W | 2x36W | 2x58W |       |       |       |  |  |  |
|  | Max. No.                   | 15    | 13    | 8     |       |       |       |  |  |  |
| Compact fluorescent w/ electromagnetic ballast no compensation | Power                      | 7W    | 10W   | 18W   | 26W   |       |       |  |  |  |
|  | Max. No.                   | 50    | 45    | 40    | 25    |       |       |  |  |  |
| Compact fluorescent w/ electromagnetic ballast                 | Power                      | 11W   | 15W   | 20W   | 23W   |       |       |  |  |  |
|  | Max. No.                   | 80    | 60    | 50    | 40    |       |       |  |  |  |

### Discharge lamps

|   |                            |      |      |      |      |      |  |  |  |  |
|---|----------------------------|------|------|------|------|------|--|--|--|--|
| High pressure mercury - no compensation       | Power                      | 50W  | 80W  | 125W | 250W | 400W |  |  |  |  |
|   | Max. No.                   | 11   | 9    | 7    | 3    | 2    |  |  |  |  |
| High pressure mercury - parallel compensation | Power                      | 50W  | 80W  | 125W | 250W | 400W |  |  |  |  |
|   | Max. No.                   | 9    | 8    | 6    | 3    | 2    |  |  |  |  |
|   | C total max <sup>(a)</sup> | 63µF | 56µF | 60µF | 54µF | 50µF |  |  |  |  |
| High pressure sodium - no compensation        | Power                      | 70W  | 150W | 250W | 400W |      |  |  |  |  |
|   | Max. No.                   | 9    | 5    | 3    | 2    |      |  |  |  |  |
| High pressure sodium - compensated            | Power                      | 70W  | 150W | 250W | 400W |      |  |  |  |  |
|   | Max. No.                   | 5    | 3    | 2    | 1    |      |  |  |  |  |
|   | C total max <sup>(a)</sup> | 60µF | 54µF | 64µF | 50µF |      |  |  |  |  |

(a): Maximum capacity

## Safety transformers

These transformers are designed to ensure personal safety, their primary winding are electrically separated from their secondary windings and they are intended to feed safety extra low voltage (SELV) circuits  $\leq 50V$ . A thermal overload, in the primary windings, ensures that if a short circuit or an overload occurs in the output it will not damage the device.

## Bell transformers

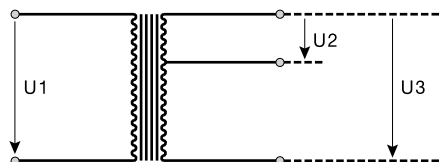
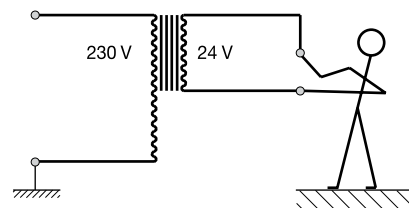
Bell transformers are similar to safety transformers but the secondary voltages do not exceed 24 volts, they are also similarly protected against short circuits and overloads, by thermal protection in the primary winding.

## Compliance with the standards

The bell and safety transformers conform with EN 61558 (BS 3535). Where transformers are to be used in a common enclosure with other devices, heat dissipation inserts should be used.

## Recommendation of Use



- To link only a secondary (never link both simultaneously)
- Do not connect (in series or in parallel) secondaries of different transformers.



## Technical specification

| Reference                   |       | ST303                                  | ST305      | ST312         | ST315         |
|-----------------------------|-------|--|------------|---------------|---------------|
| Nominal power               |       | 8VA                                    | 16VA       | 25VA          | 63VA          |
| Designation                 |       | Bell                                   | Bell       | Safety        | Safety        |
| Primary voltage             | $U_1$ | 230 volts                              | 230 volts  | 230 volts     | 230 volts     |
| Secondary voltage           | $U_2$ | 8 volts                                | 8 volts    | 12 volts      | 12 volts      |
|                             | $U_3$ | 12 volts                               | 12 volts   | 24 volts      | 24 volts      |
|                             |       | $I_n = 1A$                             | $I_n = 2A$ | $I_n = 2.08A$ | $I_n = 5.25A$ |
| No load secondary           | $U_2$ | 15 volts                               | 12 volts   | 14 volts      | 14 volts      |
| Voltage                     | $U_3$ | 22 volts                               | 13 volts   | 29 volts      | 27 volts      |
| Galvanic insulation         |       | 4kV                                    | 4kV        | 4kV           | 4kV           |
| Max functional temperature  |       | 35°C                                   | 35°C       | 35°C          | 35°C          |
| Insulation class            |       | H                                      | B          | B             | H             |
| Overload and S/C protection |       | Thermal cut out in the primary winding |            |               |               |
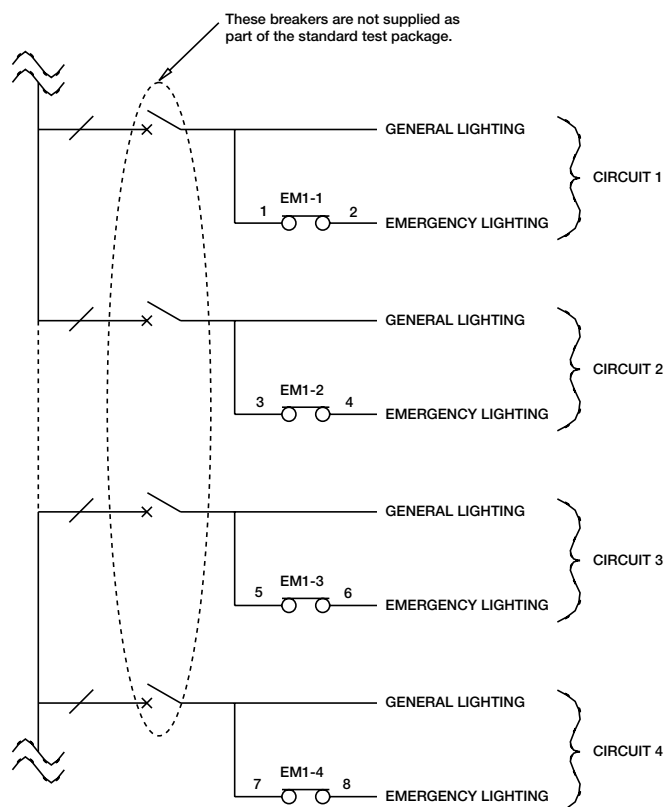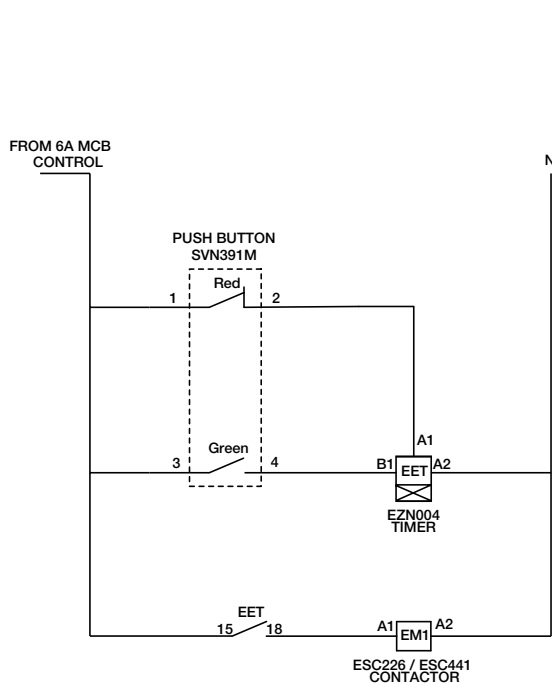
## Emergency lighting discharge test packages







# Changeover switches



Our modular manual changeover switches are a unique solution which have a three stable position switch (I-O-II) to allow you to control two power supply sources. They are available in both 2 and 4 pole versions, for single (25A, 40A or 63A) and three phase (40A or 63A) applications including the switching of generators, luminaires, machines etc.